

1.4KW Power Supply




Features :

- 100-240VAC Universal Input
- Application : UPS Charger

O/P Voltage	O/P Current	Watt
61.5V	22.76A	1400W

Derating Curve

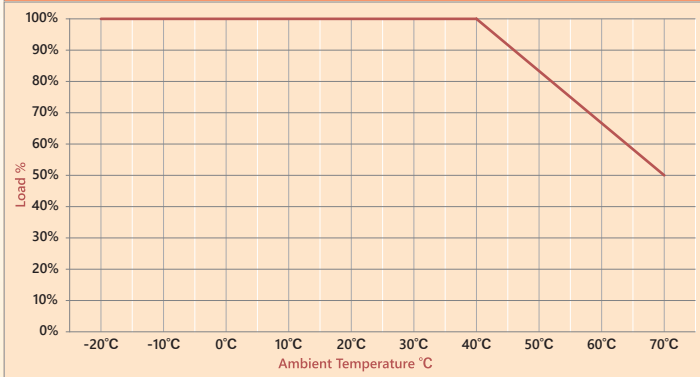

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	16A Max.
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C20

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤1% Vp-p @ Full Load
Transient(Dynamic) Response	0.5mS for 50% Load Change Typical
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS@ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Mechanical

Dimension	L 240.7 x W 153 x H 50 (mm)
Weight	2,250g (Ref.)