




# GaN FET Technology 200 Watt Series

Small Size Desktop Type

ATM200TS -  X X X

P : C6 / C14 ← O / P Voltage  
A : C8 / C18



### Features :


- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.2)
- IEC/EN/ANSI/AAMI HA60601-1-11 (Class II Only)
- EMC : IEC60601-1-2 (Edition 4.1)
- 100-240 VAC Universal Input
- Gallium Nitride Based Design
- High Power Density : 11W / in<sup>3</sup>
- With 250kHz Switching Frequency
- Means of Protection: 2 X MOPP
- Efficiency up to 95%
- Regulated Output with Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

Model	O/P Voltage	O/P Current	Watt
ATM200TS- <input type="checkbox"/> 120	12.0V	16.0A	192W
ATM200TS- <input type="checkbox"/> 150	15.0V	13.0A	195W
ATM200TS- <input type="checkbox"/> 190	19.0V	10.5A	200W
ATM200TS- <input type="checkbox"/> 240	24.0V	8.3A	200W
ATM200TS- <input type="checkbox"/> 480	48.0V	4.2A	200W

### Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	2.4A-0.9A
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C6, C8, C14, C18

### Derating Curve

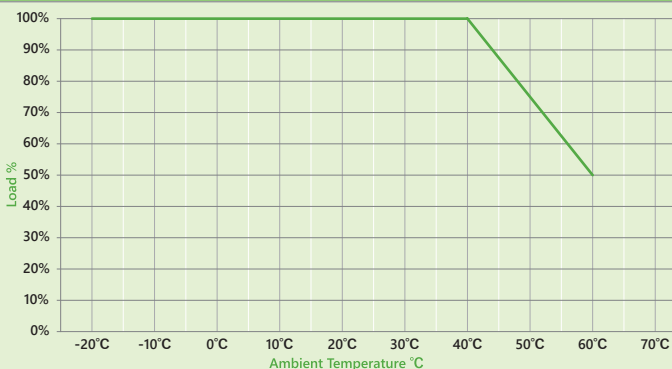

### Output

Load Regulation	±5% ( Typical )
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

### Electrical

Topology	LLC
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current (Patient) Leakage Current	< 100µA
Earth Leakage Current	< 5mA
Efficiency	DoE Level VI, ErP Stage 2, CoC Tier 2
EMC Standards	EN55011
	EN61000-3-2,3
	EN61000-4-2,3,4,5,6,8,11
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

### Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

### Mechanical

Case Dimension	L 166.5 × W 54.2 × H 33 (mm)
Weight	620g (Ref.)